


Rockfon® Medicare™ Standard

Datasheet



Rockfon® Medicare™ Standard





- Fulfills all standard cleaning and hygienic requirements for use in healthcare environments
- Does not contribute to the growth of MRSA and ensures low particle emission (ISO Class 5)
- High sound absorption and highest fire safety (Class A1)
- Basic range of tile dimensions in semi-concealed and visible grid options

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Healthcare


Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System
 <p>A15</p>	600 x 600 x 15	2,0	Chicago Metallic™ T15 4070
		2,0	Chicago Metallic™ T15 Ultraline 3500
		2,0	Chicago Metallic™ T15 Decorline 3700
	1200 x 600 x 15	2,0	Chicago Metallic™ T15 4070
		2,0	Chicago Metallic™ T15 Ultraline 3500
		2,0	Chicago Metallic™ T15 Decorline 3700
 <p>A24</p>	600 x 600 x 15	2,0	Chicago Metallic™ T24 3830
		2,0	Chicago Metallic™ T24 1812
	1200 x 600 x 15	2,0	Chicago Metallic™ T24 3830
		2,0	Chicago Metallic™ T24 1812
		2,2	Chicago Metallic™ T15 4070
		2,2	Chicago Metallic™ T15 Ultraline 3500
 <p>E15</p>	600 x 600 x 15	2,2	Chicago Metallic™ T15 Decorline 3700
		2,2	Chicago Metallic™ T15 4070
		2,2	Chicago Metallic™ T15 Ultraline 3500
	1200 x 600 x 15	2,2	Chicago Metallic™ T15 Decorline 3700
		2,2	Chicago Metallic™ T15 4070
		2,2	Chicago Metallic™ T15 Ultraline 3500
 <p>E24</p>	600 x 600 x 15	2,2	Chicago Metallic™ T24 3830
		2,2	Chicago Metallic™ T24 1812
	1200 x 600 x 15	2,2	Chicago Metallic™ T24 3830
		2,2	Chicago Metallic™ T24 1812
		2,2	Chicago Metallic™ T24 3830
		2,2	Chicago Metallic™ T24 1812



Performance



Sound absorption
 α_w : 0.95 (Class A)

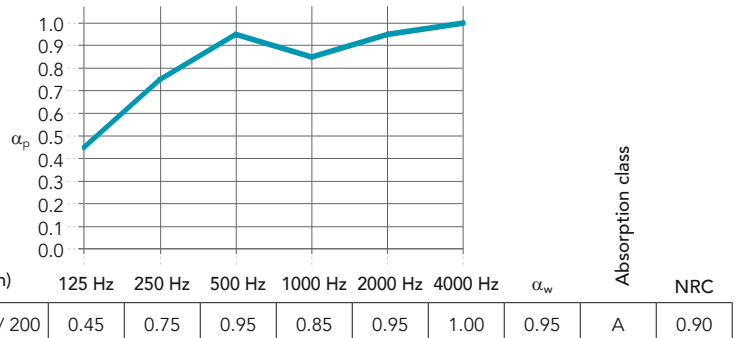

Reaction to fire
 A1



Light reflection
 86%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning
 - Vacuum
 - Damp cloth



Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.
 Tested with:
 - Methicillin Resistant Staphylococcus Aureus (MRSA)
 - Candida Albicans
 - Aspergillus Brasiliensis



Clean Room
 ISO Class 5



Environment
 Recyclable



Indoor environment
 A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Rockfon® is a registered trademark
of the ROCKWOOL Group.

07.2020 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Rockfon Singapore

ROCKWOOL Building Materials (Singapore)
Pte Ltd.
No. 8, Tuas Avenue 2
Jurong Town
Singapore 639448
Tel: (+65) 6861 4722
Fax: (+65) 6862 3533

Rockfon Malaysia

Chicago Metallic (Malaysia) Sdn Bhd
PTD 220527,
Jalan Indah Gemilang,
Taman Perindustrian Cemerlang,
81800 Ulu Tiram,
Johor, Malaysia
Tel: (+607) 863 3539
Fax: (+607) 863 1525

Rockfon Hong Kong

ROCKWOOL Building Materials (Hong Kong)
Ltd. Unit 301-2, 3/F, Koon Wah Building,
No.2 Yuen Shun Circuit,
Yuen Chau Kok, Shatin,
N.T., Hong Kong
Tel: (+852) 2576-6117
Mobile: (+852) 9161-7924

