

DATASHEET

Rockfon Eclipse®



Sounds Beautiful

Rockfon Eclipse®










- Innovative and aesthetically pleasing frameless acoustic ceiling island, offering excellent sound absorption and supplied in a smooth, deep-matt, super white surface providing high light reflection, light diffusion and anti-static properties, extending its product lifetime
- Rockfon Eclipse is available in a variety of shaped formats with a clean minimalistic A edge and an unlimited custom colour range using NCS
- Quick and easy to install, Rockfon Eclipse can be used alone or where a traditional suspended ceiling cannot be installed
- Perfect for thermal mass installations with rear surface providing excellent heat and light reflection

Product Description

- Stone wool island
- Visible side: smooth, deep matt, super white painted fleece
- Rear side: white backing fleece
- Painted edges

Application Areas

- Retail
- Education
- Office
- Leisure

Edge detail	Shapes	Module size (mm)	Weight (kg/unit)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
	Square 	1160 x 1160 x 40	9	15 / 150	Rockfon® System Eclipse Island™	38%		6.46	8.37
	Rectangle 	1760 x 1160 x 40	13	15 / 150	Rockfon® System Eclipse Island™				
		2360 x 1160 x 40	17	15 / 150	Rockfon® System Eclipse Island™				
	Circle 	800 x 800 x 40	3	15 / 150	Rockfon® System Eclipse Island™				
		1160 x 1160 x 40	7	15 / 150	Rockfon® System Eclipse Island™				
	Triangle 	1160 x 1005 x 40	4	15 / 150	Rockfon® System Eclipse Island™				
	Hexagon 	1160 x 1006 x 40	6	15 / 150	Rockfon® System Eclipse Island™				
	Oval 	1760 x 1160 x 40	10	15 / 150	Rockfon® System Eclipse Island™				
Bespoke 	9		15 / 150	Rockfon® System Eclipse Island™					

MS = Minimum Suspension

Free-form sizes bigger than 2400 length or 1200 width will be produced as two halves.
Contact us for special shapes, colours, sizes, lead times and minimum quantities.

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



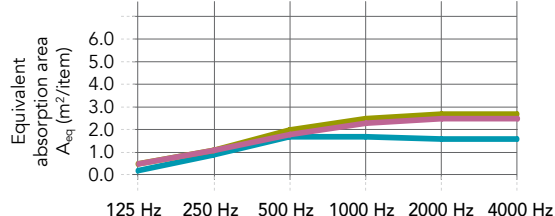
Performance




Sound absorption

A_{eq} (m²/item)


* Distance between items greater or equal to 2000mm. Further acoustic data available; contact your local Rockfon technical support.



	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Square 1160 single item* (suspension height: 13mm)	0.2	0.9	1.7	1.7	1.6	1.6
Square 1160 single item* (suspension height: 500mm)	0.5	1.1	2.0	2.5	2.7	2.7
Square 1160 array of 5 items, 300mm distance (suspension height 500mm)	0.5	1.1	1.8	2.3	2.5	2.5

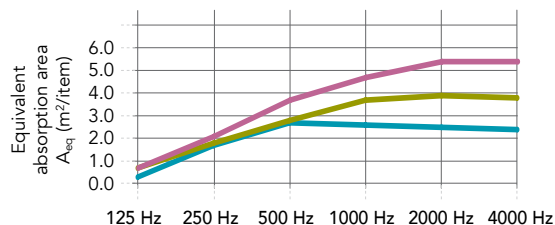

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Rectangle 1760 single item* (suspension height: 13mm)	0.3	1.7	2.7	2.6	2.5	2.4
Rectangle 1760 single item* (suspension height: 500mm)	0.7	1.8	2.8	3.7	3.9	3.8
Rectangle 2360 single item* (suspension height: 500mm)	0.7	2.1	3.7	4.7	5.4	5.4

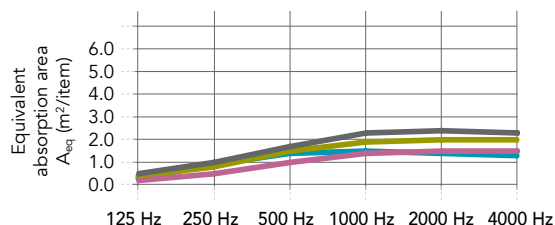

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Circle 1160 single item* (suspension height: 13 mm)	0.3	0.9	1.4	1.5	1.4	1.3
Circle 1160 single item* (suspension height: 500 mm)	0.4	0.8	1.5	1.9	2.0	2.0
Triangle 1160 single item* (suspension height: 500 mm)	0.2	0.5	1.0	1.4	1.5	1.5
Hexagon 1160 single item* (suspension height: 500 mm)	0.5	1.0	1.7	2.3	2.4	2.3



Reaction to fire

A1

Rockfon Eclipse Rectangle 2360: A2-s1,d0



Light reflection and light diffusion

87% light reflection (rear side: 79%)
>99% light diffusion



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity
Rockfon Eclipse is not suitable for use in swimming pools or outdoors.
For more information, please contact Rockfon.



Cleaning

- Vacuum
- Damp cloth



Hygiene

Stone wool provides no sustenance to microorganisms



Visual appearance

Super white surface

L value: 94.5

The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light

Gloss: 0.8 gloss unit at 85° angle

The gloss of the product is tested in accordance with ISO 2813.



Surface durability

Enhanced durability and dirt resistance.

Wet-scrub resistance: Class 5

The wet-scrub resistance is tested in accordance with EN ISO 11998:2007 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

All performance properties in this datasheet are solely based on the Rockfon Blanka® super white surface. All other colours can influence the product's performance. Please contact Rockfon technical support for more information.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

12.2023 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

